


The **Isotrack H series** is a heavy duty temporary access mat that provides safe work areas over soft ground conditions and hard surfaces. Suitable for a wide range of applications and easy to install.

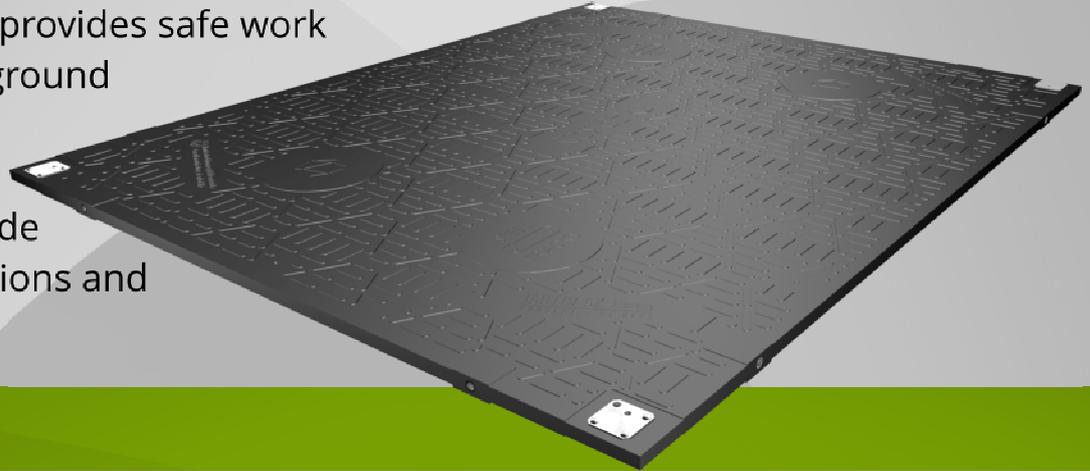


### KEY BENEFITS

- Support vehicle and equipment weights up to 150 tonnes\*
- Easy and quick to unload using lifting equipment or forklifts
- Fast and easy to install using a choice of connection options
- Install roadways, working pads, parking and turning areas
- IsoTraction® surface design for superior traction
- Safe movement and access for vehicles, equipment and people
- Mats gently flex with ground contours – no ground preparation required
- Prevent severe rutting and damage – avoid ground reinstatement costs
- Prevent vehicles and equipment from getting bogged down - keep your project running and avoid delays
- One piece compression moulded high performance recycled thermoplastic material resistant to chemicals and oil and is UV protected
- Flexible but tough and durable mat for long life use
- Low theft risk compared to aluminium and steel mats
- 100% recyclable at end of life

### KEY INFORMATION & FEATURES

- Manufactured to the highest quality standards
- One mat but two different traction surfaces – rugged IsoTraction® surface for vehicles with rubber tyres and low profile traction surface for steel tracks and pedestrian use
- Steel reinforced lifting points Customer logo option

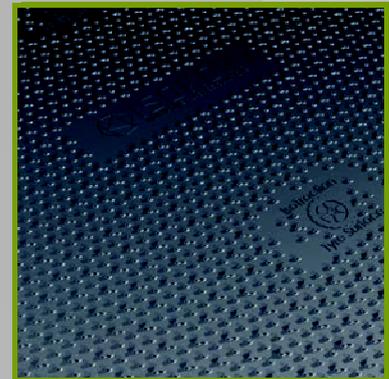





**APPLICATIONS - MAIN SECTORS**

- Construction and civil engineering
- Utilities
- Oil and gas
- Mining

- Transmission
- Drilling contractors
- Events
- Any projects requiring safe temporary access for heavy vehicles and equipment

## SAFETY AND PERFORMANCE


- IsoTraction® surface design is based on major tyre manufacturer traction research and has been independently tested to demonstrate superior grip for vehicles compared to other mats.
- Prevent vehicles and workers getting bogged down – avoid costs associated with project delays.
- Avoid ground reinstatement costs.
- Cannot puncture and take on water or contaminants.
- Easy to clean after use.

General information	
Overall Dimensions	3000 x 2500 x 40 mm
Useable Surface Area	7,5 m <sup>2</sup>
Weight	295 kg
Material	Recycled HDPE
Colour	Black (standard), other colours optional
Logistic	Open top standard high cube 40' container 50 mats, Truck standard EU 80 mats
Handling	Can use lifting hooks, slings, eye bolts or forklifts.
Connection	Using standard M16 bolts with steel or flexible straps. Steel reinforced connection points.
Recycling	100% recyclable
Safety	Raised nub surfaces provide enhanced traction for vehicle safety
Environmental	No liquid absorption and chemically inert. Easy to clean/decontaminate
Load bearing capacity	150 tonnes*
Fire Rating	UL 94HB


\* Load capacity is dependent to ground conditions.

### TRACTION TESTING OF ISOTRACK H MATS

#### Dry Conditions

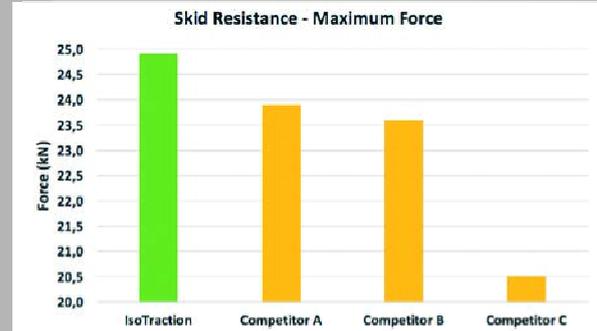

#### Mud Conditions

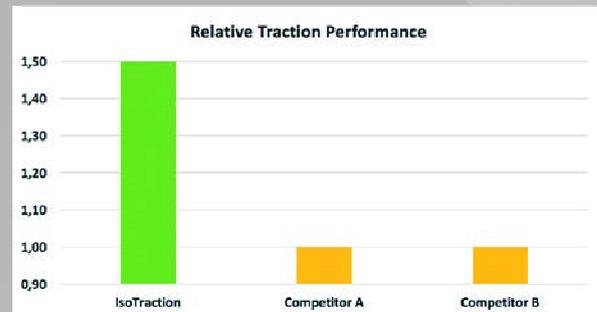

- Testing was undertaken by Ljubljana University to compare the effectiveness of the IsoTraction® nub surface design with the nub surface designs of major mat competitors (solid and cellular core mats)
- A fixed load was applied to a truck tyre (pressure 6,3 bars) with a contact area of 540cm<sup>2</sup>.
- The force required to move each mat surface sample under the tyre was recorded.
- Testing was carried using dry surfaces and with mud applied to the mat surface samples.
- The IsoTraction® nub design recorded up to 20% better results compared to the competitor nub surface designs in dry conditions and 50% better in wet mud conditions.



For more information, contact us today or visit our website:

[www.groundtrax.com](http://www.groundtrax.com)

**GROUNDTRAX**  
 Ground Protection and Reinforcement  
 Telephone: 03456 800008 | Fax: 03456 800208  
 E-Mail: [info@groundtrax.com](mailto:info@groundtrax.com) | Website: [www.groundtrax.com](http://www.groundtrax.com)